



# TriBox Kite

\_\_\_\_\_ x 9


1. Unroll the kite and place face down on a flat surface. Check that the three body spars are securely inserted into their End Pockets inside the sail.

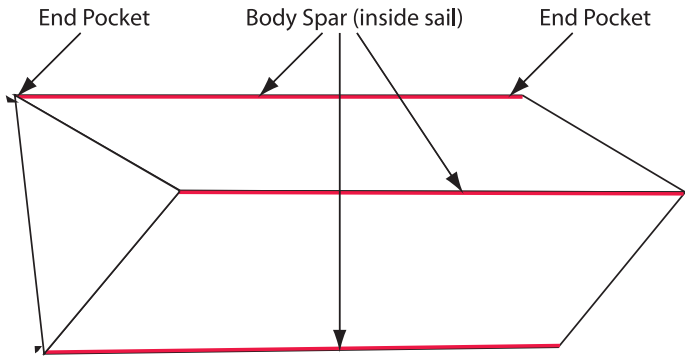


2. Locate the fittings attached to the ends of the Body Spars. Insert one of the small spars into the fitting, then into a fitting on one of the other Body Spars to form the triangle opening. Repeat for all six fittings at both ends of the kite.

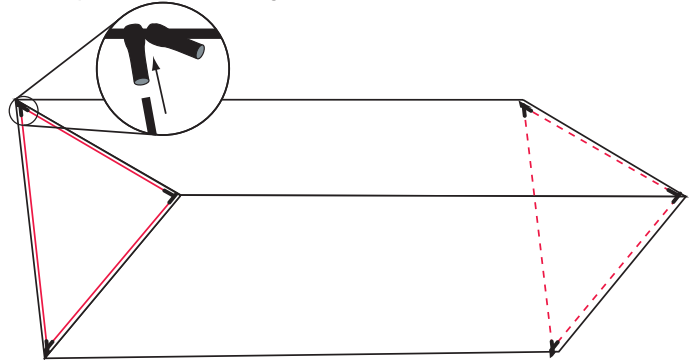

3. Reach inside the sail and find the fittings located at the midpoint of the kite. Insert the spars into the fittings as before.

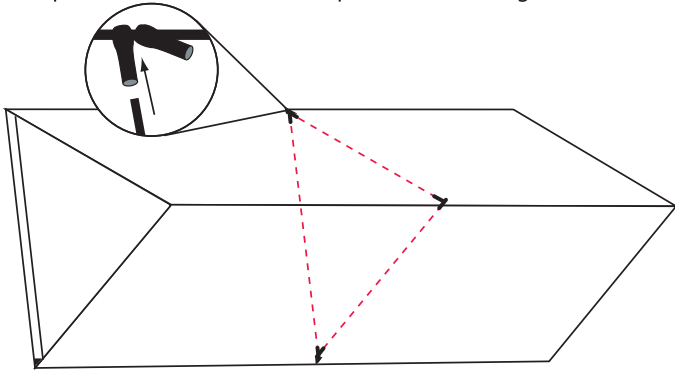

4. Attach flying line to Tow Point as shown below.

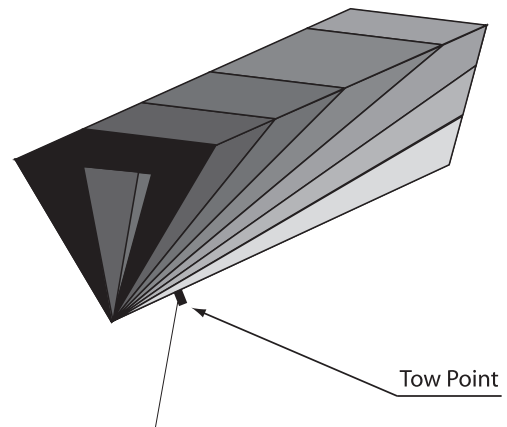

## Tips & Tricks

1. Kites fly best in wide open spaces. Avoid flying in areas near buildings and trees.
2. To Launch, stand with the wind to your back.
3. Hold the kite with the nose up in one hand while securely holding the winder in the other.
4. When you feel the pressure of the wind against the kite, let go. As the kite rises, slowly release the line.
5. A high altitude launch is an effective method of getting your kite off the ground in light winds. Have someone stand downwind as you let out as much line as possible (>100 feet). As the kite is released into the wind, tug on the line.